



3fly.at

OE-DGE

Diamond DA40-180

MTOM = 1150 kg / 2.535 lb

A/C-Size: W: 11.9 m H: 2.0 m L: 8.0 m

OPERATOR	
MFU Pilotenclub	
A-2542 Kottlingbrunn	
Flugplatz 1, Top 1	
www.mfu-pilotenclub.at	
+43 2252 77340	

FPL (EXAMPLE)	
7	A/C ID OE-DGE
8	Flight Rules V,I,Y,Z
	Type of Flight G
9	Type of A/C DA40
	Wake Turbul. Cat. L
10	Equipment BDFGLORY/S
13	Departure A/D LOAV
	Departure Time 0830
15	Speed N0125
	Flight Level 080
	Route SNU GRZ
16	Destination A/D LJMB
	Total EET 0045
	Alternate A/D LOWG
18	Other Info EET/GOLVA0045
	PBN/B2C2D2O2S2 NAV/SBAS
19	Endurance 04:00
	Persons on Bord 2
	Emerg. Equipm. ELT
	A/C Colour WHITE
	Name PIC NAME

CONTACT	
Tower LOAV	+43 1 700729201
Maint. LOAV	+43 2252 790894
AIS	+43 51703 3211
MET	+43 51703 3443

FUEL	
Fuel	AVGAS 100LL
Maximum Fuel	156 L / 41.2 gal
Unusable Fuel	3.8 L / 1 gal

OIL	
Shell Aero	15 W 50
Minimum	4 quarts
Minimum IFR	6 quarts

TIRE	
Front Tire	29 psi / 2.0 bar
Main Tires	36 psi / 2.5 bar

SPEED	
V _{SO} (Stall- Flaps max)	49 KIAS
V ₀ (Stall- Flaps up)	52 KIAS
V _G (Flaps up)	60-73 KIAS *
Max. Demo. X-Wind	20 knots

*) A/C - Mass 850Kg - 1150Kg

COM FAIL	
<input type="checkbox"/>	Clear to Land
<input type="checkbox"/>	Return to Landing
<input type="checkbox"/>	Continue Circling
<input type="checkbox"/>	A/D unsafe, don't Land
<input type="checkbox"/>	Approach this A/C increased to Apron - Wait for Clearance
<input type="checkbox"/>	Do not Land

PREFLIGHT

1 Wing Tanks & Gascolator	DRAIN
2 A/C Doc, Mass&Bal	CHECK

CABIN CHECK


3 Ignition Key	REMOVE
4 Canopy, Rear Door	CHECK
5 Electr. Equipment	OFF
6 Circ. Breaker	ALL-IN
7 Control Levers	Check Free
8 Prop	FULL FWD
9 Throttle	IDLE
10 Mixture	LEAN
Master – BAT	ON
Annunc. Panel	CHECK
Fuel Quantity	CHECK
Pos. Light, ACL	CHECK
Ldg. / Taxi - Light	CHECK
Master – BAT	OFF
17 Loose Items	CHECK
18 Flight Control	CORRECT
19 Trim Tab	MOVABLE
20 Baggage	SECURED

1. Left Main Gear

21 Gear Strut	VIS. INSP.
22 Strut Fairing	VIS. INSP.
23 Wheel Fairing	VIS. INSP.
24 Tire 36psi / 2,5 bar	CHECK
25 Tire Wear, Tread	CHECK
26 Wheel Brake	VIS. INSP.
27 Break Line Leaks	CHECK
28 Slip Marks	VIS. INSP.
29 Chocks	REMOVE

2. Left Wing

30 Wing Surfaces	VIS. INSP.
31 Step	VIS. INSP.
32 Air Intake Lower	VIS. INSP.
33 Openings Lower	CHECK
34 Tank Drain	DRAIN
35 Stall Warning	CHECK
36 Tank Filler	VIS. INSP.
37 Tank Air Outlet	VIS. INSP.
38 2x Stall Strips	VIS. INSP.
39 Pitot Probe	CLEAN
40 Ldg. / Taxi Lights	VIS. INSP.
41 Wing Tip	VIS. INSP.
42 Pos. Light & AC	VIS. INSP.
43 Tiedown	CHECK, CLEAR
44 Aileron & Linkage	VIS. INSP.
45 Aileron Hinges & Pin	Aileron & Linkage
46 Foreign. Obj. AileronPad	VIS. INSP.
47 Flap & Linkages	VIS. INSP.
48 Flap Hinges & Pin	VIS. INSP.

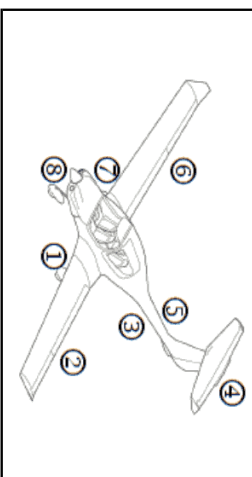EXTERIOR CHECK

Consult POH/AFM for "Warnings, Cautions and additional Information"

This document does not replace POH/AFM - (DGE 2022 V2.4)

Airspeeds for Normal Operations

TAKEOFF

A/C Mass	850 - 1150 kg
V _Y Flaps T/O	54 - 66 KIAS
Cruise Climb Flaps UP	60 - 73 KIAS

LANDING

Final APP Flaps LDG	58 - 71 KIAS
Balked Ldg Flaps T/O	54 - 66 KIAS
Max. demo X Wind	20 knots
V _{FE} max, Flaps LDG	91 KIAS

CRUISE

V _A Maneuvering	94 - 108 KIAS*
V _{NO} Max turbul. Air	129 KIAS
V _{NE} Max Airspeed	178 KIAS

Airspeeds for Emergency Operations

V _A Maneuvering	94 - 108 KIAS*
Engine Off - Best Glide / Flaps Up	60 - 73 KIAS
Engine Off - Best Glide / Flaps T/O	59 - 72 KIAS
Engine Off - Best Glide / Flaps LDG	59 - 71 KIAS
Engine Failure after T/O Flaps T/O	59 - 72 KIAS
Engine Failure after T/O / Flaps Up	60 - 73 KIAS

*) A/C - Mass 780Kg - 980Kg 94 KIAS

*) A/C - Mass 981Kg - 1150Kg 108 KIAS

3. Fuselage (Left)

49 Canopy Left side	VIS. INSP.
50 Rear Door, Window	VIS. INSP.
51 Fuselage Skin	VIS. INSP.
52 Antennas	VIS. INSP.

4. Empennage

53 Stabilizer Contr. Surf.	VIS. INSP.
54 Hinges	VIS. INSP.
55 Elev. Trim, Wire	VIS. INSP.
56 Rudder Trim Tab	VIS. INSP.
57 Fin Tiedown	CHECK, CLEAR
58 Tail Skid & Lower Fin	VIS. INSP.

5. Fuselage (Right)

59 Fuselage Skin	VIS. INSP.
60 Window	VIS. INSP.
61 Canopy Right Side	VIS. INSP.

6. Right Wing

62 Flap & Linkages	VIS. INSP.
63 Flap Hinges & Pin	VIS. INSP.
64 Aileron & Linkage	VIS. INSP.
65 Aileron Hinges & Pin	VIS. INSP.
66 Foreign.Obj.AileronPad	VIS. INSP.
67 Wing Tip	VIS. INSP.
68 Pos.Light & AC	VIS. INSP.
69 Tiedown	CHECK, CLEAR
70 Wing Surfaces	VIS. INSP.
71 2x Stall Strips	VIS. INSP.
72 Tank Air Outlet	VIS. INSP.

73 Tank Filler	VIS. INSP.
74 Openings Lower	CHECK
75 Tank Drain	DRAIN
76 Step	VIS. INSP.

7. Right Main Gear

77 Gear Strut	VIS. INSP.
78 Strut Fairing	VIS. INSP.
79 Wheel Fairing	VIS. INSP.
80 Tire 36psi / 2,5 bar	CHECK
81 Tire Wear, Tread	CHECK
82 Wheel Brake	VIS. INSP.
83 Break Line Leaks	CHECK
84 Slip Marks	VIS. INSP.
85 Chocks	REMOVE

8. Front Fuselage

86 Oil Level 6-8 Qts	CHECK
87 Cowling	VIS. INSP.
88 3 Air Intakes	CLEAR
89 Propeller	VIS. INSP.
90 Spinner & Screws	VIS. INSP.
91 Nose Landing Gear	VIS. INSP.
92 Tire and Wheel	VIS. INSP.
93 Slip Marks	VIS. INSP.
94 Strut Fairing	VIS. INSP.
95 Tire Wear, Tread	CHECK
96 Wheel Fairing	VIS. INSP.
97 Tow Bar	REMOVE
98 Tire 29psi / 2,0bar	CHECK
99 Chocks	REMOVE

100	Exhaust	VIS. INSP.
101	Forw. Cabin Inlets	CLEAR
102	Antennas	VIS. INSP.
103	Gascolator	DRAIN
104	Venting Pipes	CHECK
105	Fuselage Underside	CLEAN

BEF. ENGINE START

1	Preflight Check	COMPL
2	Rudder Pedals	ADJUST
3	Passenger Briefing	COMPL
4	Seat Belts / Harness	FASTEN
5	Baggage	SECURE
6	Rear Door	LOCKED
7	Door Lock	UNBLOCKED
8	Front Canopy	POS. 1 or 2
9	Canopy Lock	UNBLOCKED
10	Parking Brake	SET
11	Flight Controls	FREE
12	Trim Wheel	SET T/O
13	Throttle	IDLE
14	Prop	FULL FWD
15	Mixture	LEAN
16	Friction Device	ADJUST
17	Alternate Air	CLOSED
18	Alternate Static	CLOSED
19	Avionics Master	OFF
20	Essential Bus	OFF
21	Master - BAT	ON
22	Annunciator Panel	Test 5secs.
23	Fuel Tank Selector	FULLER TANK


ENGINE START

1	Bef. Engine Start CL	COMPL
2	Strobe Light / ACL	ON
3	Fuel Pump	ON
4	Throttle	3 cm OPEN
5	Mixture	3-5 SEC RICH
6	Mixture	LEAN
7	Throttle	1 cm OPEN
8	Mixture	1 SEC RICH
9	Mixture	LEAN
10	Fuel Pump	OFF
11	Prop Area	CLEAR
12	Ignition	START
13	Mixture when fires	RICH
14	Oil Press. < 15 sec	IN RANGE
15	Master - ALT	ON
16	Ammeter	Check
17	Fuel Press. 14-35 psi	CHECK
18	Annunciator Panel	CHECK 5 SECS.

FLOODED ENGINE START

1	Strobe Light / ACL	ON
2	Fuel Pump	OFF
3	Mixture	LEAN
4	Throttle	MID POS
5	Prop Area	CLEAR
6	Ignition	START
7	Throttle When Fires	PULL BACK
8	Mixture	RAPIDLY RICH
9	Oil Press. < 15 sec	IN RANGE

DA 40 - TAKE-OFF DISTANCES

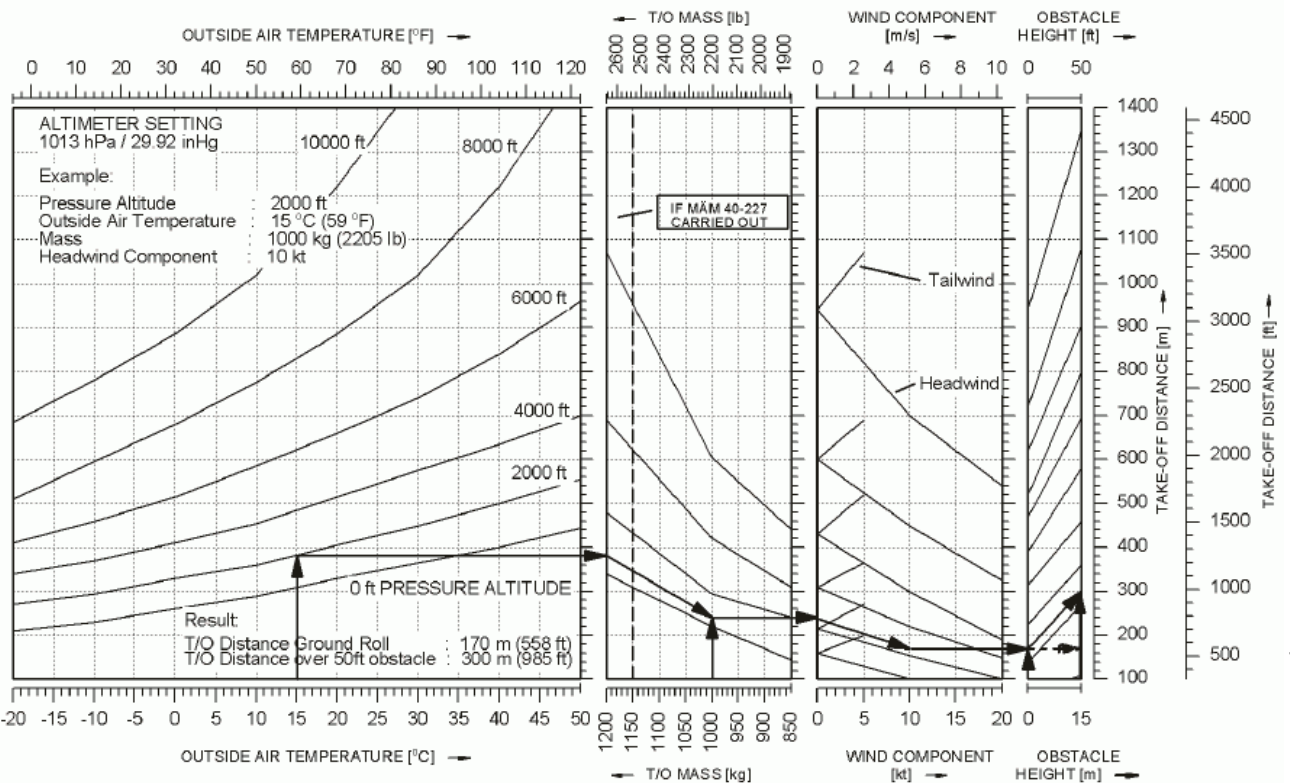

Motorleistung in % der maximalen Startleistung	75 %		65 %		55 %		45 %		35 %		25 %		15 %		5 %	
	2400	2200	2400	2200	2400	2200	2400	2200	2400	2200	2400	2200	2400	2200	2400	2200
Drehzahl	1800		2000		2200		2400		2600		2800		3000		3200	
	Best Economy	Best Power	Best Economy	Best Power	Best Economy	Best Power	Best Economy	Best Power	Best Economy	Best Power	Best Economy	Best Power	Best Economy	Best Power	Best Economy	Best Power
Fuel Flow	[US gal/h]		[US gal/h]		[US gal/h]		[US gal/h]		[US gal/h]		[US gal/h]		[US gal/h]		[US gal/h]	
ISA	[°C]		[°C]		[°C]		[°C]		[°C]		[°C]		[°C]		[°C]	
Ansaugdruck (MP)	[inHg]		[inHg]		[inHg]		[inHg]		[inHg]		[inHg]		[inHg]		[inHg]	
	27,3	26,8	25,5	25,2	24,8	24,5	24,1	24,1	23,7	23,3	22,9	22,5	22,1	21,7	21,3	20,9
Ansaugdruck (MP)	[inHg]		[inHg]		[inHg]		[inHg]		[inHg]		[inHg]		[inHg]		[inHg]	
	25,8	25,5	25,2	24,8	24,5	24,1	23,7	23,3	22,9	22,5	22,1	21,7	21,3	20,9	20,5	20,1
25,8	27,3	26,8	25,5	25,2	24,8	24,5	24,1	24,1	23,7	23,3	22,9	22,5	22,1	21,7	21,3	20,9
1000	22,4	21,0	19,9	18,7	23,6	22,2	21,0	26,4	24,5	23,2	22,9	22,6	22,1	21,7	21,3	20,9
2000	22,1	20,7	19,6	18,4	23,3	21,9	20,7	26,0	24,2	22,9	22,6	22,1	21,7	21,3	20,9	20,5
3000	21,8	20,4	19,3	18,2	23,0	21,6	20,4	25,7	23,8	22,6	22,1	21,7	21,3	20,9	20,5	20,1
4000	21,5	20,2	19,0	17,9	22,7	21,2	20,1	25,4	23,5	22,3	21,8	21,4	21,0	20,6	20,2	19,8
5000	21,2	19,9	18,7	17,6	22,3	20,9	19,8	25,1	23,1	22,0	21,5	21,1	20,7	20,3	19,9	19,5
6000	20,9	19,6	18,4	17,4	22,0	20,6	19,5	24,8	22,8	21,7	21,2	20,8	20,4	20,0	19,6	19,2
7000	20,5	19,3	18,2	17,1	21,7	20,3	19,3	24,5	22,4	21,4	20,9	20,5	20,1	19,7	19,3	18,9
8000	20,2	19,0	17,9	16,9	21,3	20,0	19,0	24,2	22,1	21,0	20,5	20,1	19,7	19,3	18,9	18,5
9000	19,9	18,7	17,6	16,6	21,1	19,7	18,7	24,0	21,9	20,7	20,2	19,8	19,4	19,0	18,6	18,2
10000	19,6	18,4	17,3	16,3	20,8	19,4	18,4	23,7	21,6	20,4	19,9	19,5	19,1	18,7	18,3	17,9
11000	19,3	18,2	17,0	16,1	20,5	19,1	18,1	23,4	21,3	20,1	19,6	19,2	18,8	18,4	18,0	17,6
12000	17,9	16,7	15,8	14,8	19,1	17,8	16,8	23,1	21,0	19,8	19,3	18,9	18,5	18,1	17,7	17,3
13000	17,6	16,4	15,5	14,5	18,8	17,6	16,6	22,8	20,7	19,5	19,0	18,6	18,2	17,8	17,4	17,0
14000	-	16,1	15,3	14,3	18,5	17,3	16,3	22,5	20,4	19,2	18,7	18,3	17,9	17,5	17,1	16,7
15000	15,8	15,0	14,2	13,2	18,2	17,0	16,0	22,2	20,1	18,9	18,4	18,0	17,6	17,2	16,8	16,4
16000	15,5	14,7	13,9	12,9	17,9	16,7	15,7	21,9	19,8	18,6	18,1	17,7	17,3	16,9	16,5	16,1
17000	-	14,5	13,7	12,7	17,6	16,4	15,4	21,6	19,5	18,3	17,8	17,4	17,0	16,6	16,2	15,8

Shaded Areas are the recommended power settings

10 Master - ALT	ON
11 Ammeter	CHECK
12 Fuel Press. 14-35 psi	CHECK
13 Annunciator Panel	CHECK 5 SECS.

BEFORE TAXI	
1 Avionic Master	ON
2 Electr. Equipment	ON
3 Flaps all Positions	CHECK
4 Eng-/Flight Instr.	CHECK / SET
5 Instr.-/Flood light	AS REQ.
6 GTN750 NAV Data	CHECK
7 GPS Selftest	CHECK
8 Fuel Selector	LEFT/RIGHT
9 Pitot On → Ammeter	CHECK
10 Pitot	OFF
11 Taxi/Posn. Lights	AS REQ.
12 Engine Warm UP	max 1100rpm
13 Transponder	CHECK
14 Parking Barake	RELEASE
Brakes	CHECK
Flight Instruments	CHECK
Gyro Instruments	CHECK

BEFORE TAKEOFF	
1 Parking Brake	SET
2 Seat Belts/Harness	FASTEN
3 Rear Door	CLOSE LOCK
4 Front Canopy	CLOSE LOCK
5 Door Warning Light	CHECK OFF
6 Fuel Selector	FULLER TANK
7 Engine Instruments	IN GREEN
8 Circuit Breakers	CHECK IN
9 Fuel Pressuere	14-35 psi
10 Autopilot	ON
11 Flight Controls	VERRIDE
12 A/P DISC+Horn	PRESS & VFY
13 Fuel Pump	ON
14 Mixture	FULL FWD
15 Flaps	T/O
16 Trim	T/O
17 Flight Controls	FREE&CORR
18 Throttle	2000 rpm
19 Prop 3x Pull-Drop	250-500rpm
Ignition R-B-L-B	Switch
Drop max. 175rpm	Check
Diff. L/R max. 50rpm	Check
Ignition Switch Both	CONFIRM
24 Circuit Breakers	CHECK IN
25 Voltmeter	IN GREEN
26 Throttle Idle 600-800rpm	CHECK
27 Alternate Air	Closed
28 Landing Light	ON
29 Ptitot Heat	AS REQ.
30 Departure Briefing	COMPLETE
31 Parking Brake	Release

LINE UP / TAKEOFF

1	Before T/O Check	COMPL
2	Approach Sector	CLEAR
3	Runway Heading	CONFIRM
4	Transponder	ON/ALT
5	Prop	FULL FWD
6	Throttle	FULL FWD
7	Full Takeoff Power	CONFIRM
8	Elevator	NEUTRAL
9	Rudder	DIRECTION
10	Rotate (V _R)	59 KIAS
11	Climb Speed (V _Y)	60-66 KIAS*

*) A/C - Mass 1000Kg - 1150Kg

CLIMB

1	Throttle	FULL FWD
2	Mixture	RICH
3	Prop 2400 rpm	REDUCE
4	Engine Instruments	IN GREEN
5	Climb Speed (V _Y)	60-66 KIAS*
6	400ft AGL Safe Alt	CHECK
7	Flaps	UP
8	Trim	AS REQ
9	Landing Light	OFF
10	Fuel Pump	OFF
11	Fuel Press.	CHECK
12	Mixture >5000ft	SET EGT

*) A/C - Mass 1000Kg - 1150Kg

CRUISE - CLIMB

1	Flaps	UP
2	Airspeed	66-73 KIAS*
3	Prop 2400rpm	SET
4	Throttle	FULL FWD
5	Mixture >5000ft	SET EGT
6	Engine Instruments	IN GREEN
7	Trim	AS REQ
8	Fuel Pump (high Alt.)	ON

*) A/C - Mass 1000Kg - 1150Kg

CRUISE

1	Flaps	CHECK UP
2	Throttle (Page 7)	SET
3	Prop 1800 - 2400 rpm	SET
4	Mixture	SET
5	Trim	AS REQ
6	Fuel Selector	AS REQ
7	Fuel Pump (high Alt.)	ON
8	Manover Spd V _A	94/108 KIAS*
9	Turbulent Air Spd V _{no}	129 KIAS
10	Fuel Pump (high Alt)	ON

*) A/C - Mass 780Kg - 980Kg 94 KIAS

*) A/C - Mass 981Kg - 1150Kg 108 KIAS

DESCENT

1	Mixture	AS REQ
2	Prop 1800 - 2400 rpm	AS REQ
3	Throttle	AS REQ
4	Fuel Pump (high Alt.)	ON
5	Descent Planning	COMPLETE

LANDING APPROACH

1	Fuel Pump	ON
2	Fuel Selector	FULLER TANK
3	Safety Harness	FASTEN
4	Airspeed Reduce MAX	108 KIAS
5	Flaps	T/O
6	Trim	AS REQ
7	Landing Light	AS REQ

BEFORE LANDING

1	Mixture	FULL FWD
2	Throttle	AS REQ
3	Airspeed Reduce	91 KIAS
4	Prop	FULL FWD
5	Flaps	LANDING
6	Final Approach Spd	63-71 KIAS*
	Prop	FULL FWD
	Throttle	FULL FWD
	Airspeed	60-66 KIAS*
	Flaps	T/O
	400ft AGL Safe Alt	CHECK
	Prop	2400
	Airspeed	68-73 KIAS*
	Flaps	UP
	Fuel Pump	OFF

*) A/C - Mass 1000Kg - 1150Kg

AFTER LANDING

1	Throttle	IDLE
2	Brakes	AS REQ
3	Fuel Pump	OFF
4	Transponder	GND/STBY
5	Pitot Heat	OFF
6	Avionics	AS REQ
7	Landing Light	OFF
8	Taxi Light	ON
9	Flaps	UP

SHUT DOWN

1	Parking Brake	SET
2	Engine Instruments	CHECK
3	ELT (121,5 MHz)	CHECK
4	Flight Plan	CLOSE
5	Avionic Master	OFF
6	Throttle	1000 rpm
7	Taxi Light	OFF
8	Position Lights	OFF
9	Mixture	CUTOFF
10	Ignition	OFF
11	Strobes	OFF
12	Master ALT - BAT	OFF
13	Flight Logger	SLIDE CARD
14	Map Light	CHECK OFF
15	Parking Brake	AS REQ
16	Tiedown	AS REQ